

VPX3U-ORIN-CX7-SBC

NVIDIA Orin, ConnectX-7, Video I/O, SBC Profile

IN DEVELOPMENT

KEY FEATURES

- Embedded Ampere GPU with 2048 CUDA cores (5.3 TFLOPS) & 64 Gen3 Tensor cores (275 TOPS Int8)
- Embedded 12-core NVIDIA Cortex ARM64 CPU, 2.2GHz
- 64 GB LPDDR5 256-bit memory with up to 205 GB/s
- ConnectX-7, up to 100GbE Ethernet, PCIe Gen5
- SDI input/output, DP MST output, Analog output
- Module power: configurable from 80W - 120W

ADDITIONAL AGX ORIN FEATURES

- DisplayPort Multi-Stream Transport (MST) with support for two display streams
- 2x Deep Learning Accelerator (DLA) v2 engines
- Vision Accelerator engine for 7-way VLIW Vision Processor v2
- Dedicated programmable audio processor
- 2x HEVC (H.265) and AVC (H.264) NVENC and NVDEC with up to 4K-UHD encode resolution
- 1000 BASE-T Ethernet
- CUDA® 11, OpenGL® 4.6, OpenGL ES 3.2, Vulkan™ 1.0
- Flash Storage: 64 GB eMMC 5.1 with support for ECC
- USB 3.2 (up to 480 Mb/s); optional front panel port

CONNECTIVITY / SYSTEM MANAGEMENT

- Storage: NVMe 1TB
- PCI Express Gen5 Switch with x16/x32
- Backplane Ethernet with 10/40/100 GBASE-KR4 and 10 GBASE-KR data planes; supports GPUDirect RDMA
- Block-level hardware encryption and the use of dedicated encryption keys per user
- Switching is offloaded from the CPU and run on the ConnectX hardware with NVIDIA ASAP² technology
- On-board IPMI controller for system management
- Windows, Linux or ARM root complex

MECHANICAL / OPEN SYSTEMS ARCHITECTURE

- High level of ruggedization:
 - Operating temperature: -40° to +85°C
 - Vibration (sine wave): 10G peak, 5 - 2000Hz
 - Shock: 40G peak
- Dimensions: 160mm x 100mm x 25.4mm
- Weight: To be Announced
- ANSI/VITA 48, 65 (VPX REDI, OpenVPX)
- SOSA Aligned SBC slot profile 14.2.16


OVERVIEW

The VPX3U-ORIN-CX7-SBC module meets the needs of demanding C5ISR applications, providing a secure compute node which provides advanced AI and HPC processing capabilities, high data transfer rates, and the cyber security features required to ensure data is being protected. This autonomous SOSA aligned module includes an NVIDIA Jetson AGX Orin, an NVIDIA ConnectX-7 SmartNIC, and a WOLF FGX-2 which provides support for up to 4K video formats that are not native to the Orin SoC.

The NVIDIA Orin's embedded Ampere GPU provides the CUDA cores and Tensor cores for data processing, deep learning inference, machine vision, audio processing and video encoding/decoding. The 2048 CUDA cores provides 5.3 TFLOPS for processing, while the 64 Gen3 Tensor cores provides the underlying architecture required for an efficient inference engine which can achieve up to 275 TOPS (INT8) of deep learning inference computing.


The NVIDIA ConnectX-7 SmartNIC provides secure, high-speed network data transfer and a configurable PCIe Gen5 switch. ConnectX-7 is ideal to meet the high data transfer and security requirements for C5ISR tasks. The ConnectX-7 also provides support for RDMA over Converged Ethernet (RoCE) and support for NVIDIA GPUDirect, enabling the fastest method for transferring data across the network to the GPU.

Unlocking the best performance requires the best cooling capability. WOLF's advanced cooling technology is designed to move heat using a low weight, high efficiency path from the hot chip's die to the wedgelocks.

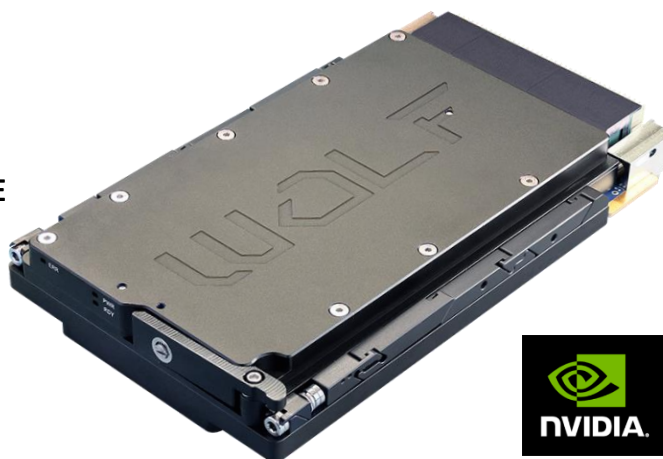


This information is subject to change

The following model provides 10/40/100 GBASE-KR4, one 10 BASE-KR, one 1000GBASE-T, and PCIe Gen4 x4.

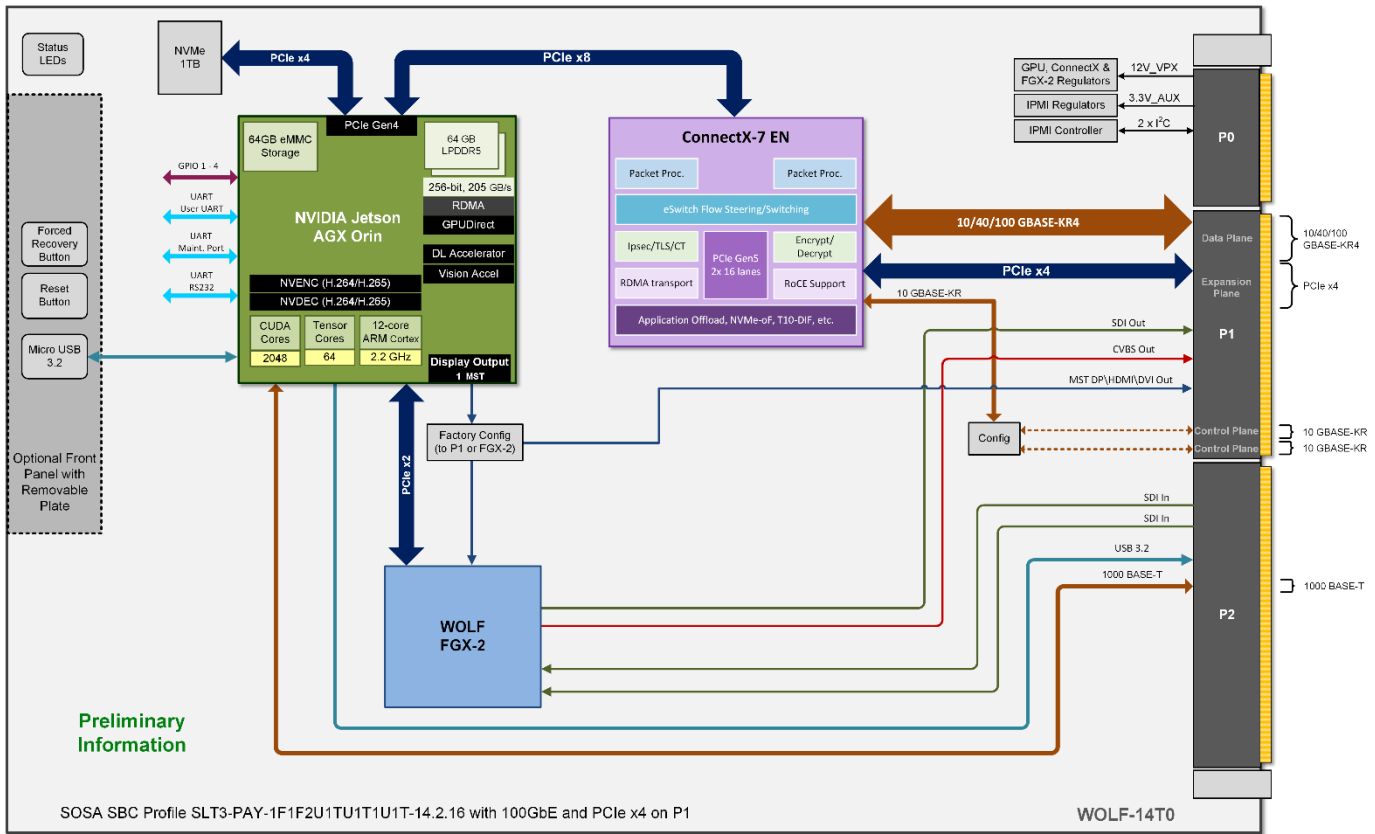

The following model provides two 10 BASE-KR, one 1000GBASE-T and two PCIe Gen4 x8.

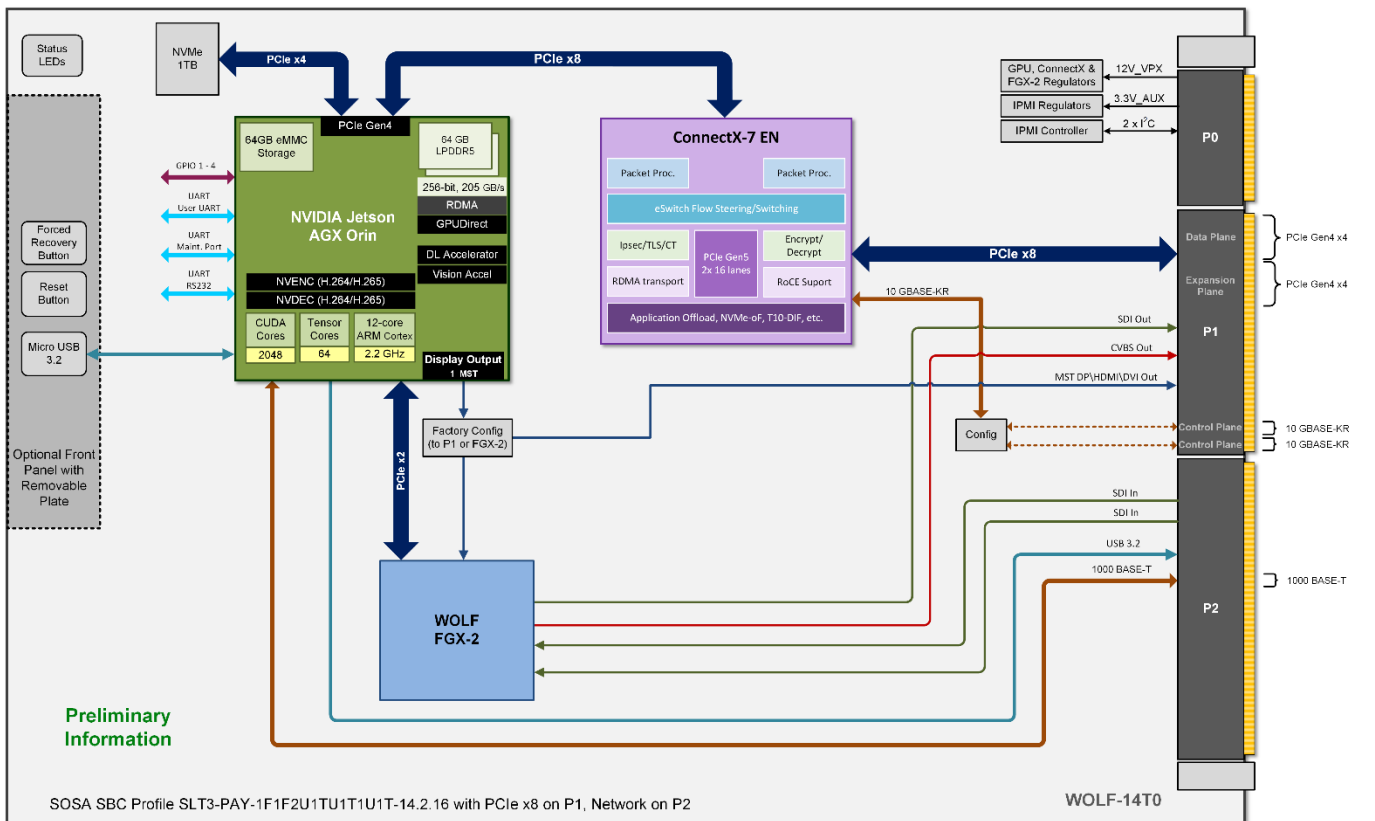

This information is subject to change

NVIDIA JETSON AGX ORIN WITH AMPERE GPU AND 12-CORE ARM CPU

Jetson AGX Orin features an embedded NVIDIA Ampere GPU with 2048 CUDA Cores and 64 Gen3 Tensor Cores, two NVIDIA deep learning accelerators, a vision accelerator, a twelve-core NVIDIA Cortex Arm CPU, and a video encoder and decoder. The NVIDIA CUDA-X accelerated computing stack and JetPack SDK support enables the Jetson AGX Orin to be a fully software-defined platform.

The Jetson AGX Orin 64GB delivers up to eight times the performance compared to the previous generation Jetson AGX Xavier. Orin can deliver up to 4 times more TFLOPS, eight times more AI TOPS, and higher memory bandwidth. Second generation NVIDIA Deep Learning Accelerators (NVDLA) can deliver up to 9 times more TOPS, while the second generation Vision Accelerator can also offer performance improvements. Connectivity has also been improved with more PCIe lanes and more available Ethernet interfaces at higher speeds. All of these performance improvements only require a modest power increase, with power settings from 15W to 60W.

TENSOR CORES FOR ARTIFICIAL INTELLIGENCE AND HPEC

Tensor Cores are designed to speed up the tensor / matrix computations used for deep learning neural network training and inferencing operations. NVIDIA Ampere architecture GPUs include the third-generation Tensor Core design which supports many new data types for improved performance, efficiency, and programming flexibility, including a new sparsity feature and a new Tensor Float 32 (TF32) precision mode.

NVIDIA provides CUDA-X AI and CUDA-X HPEC libraires which have been designed to work with NVIDIA Tensor Core GPUs to provide the tools needed to accelerate development of applications for AI and HPEC.

HARDWARE ACCELERATED VIDEO ENCODE / DECODE

The Ampere GPU includes the NVENC video encode (version 7.2) and NVENC decode (version 5) hardware acceleration engine. Using the Ampere GPU for video encoding provides an efficient, high quality method to achieve real time 8K and 4K encoding without burdening the system CPU. The NVIDIA Video Codec SDK provides a complete set of APIs, samples and documentation for hardware accelerated video encode and decode.

CONNECTX-7 PCIe GEN5 AND ETHERNET 100GbE

Getting large amounts of data into and out of a module is an important system design consideration. The WOLF-12T0 module includes a ConnectX-7 SmartNIC, which provides a configurable PCIe Gen5 interface. It also provides up to 100GBASE-KR4 on the VPX data plane, RDMA over Converged Ethernet (RoCE) with support for NVIDIA GPUDirect RDMA, and enhanced security features such as hardware-verified secure boot, hardware-accelerated cryptography, and encrypted storage.

SOSA SLOT PROFILE SUPPORT

The Sensor Open Systems Architecture (SOSA) Consortium grew out of a U.S. Department of Defense (DoD) initiative to define open standard electronic architectures to ensure component interoperability, reduce costs, encourage innovation, and help to ensure a supply of needed products.

This module supports SOSA aligned SBC slot profiles. The default profile is:

- SLT3-PAY-1F1F2U1TU1T1U1T-14.2.16

WOLF also offers a module which supports the SOSA aligned Payload slot profile, VPX3U-XAVIER-CX7-HPC.

ORDERING CODES

The following table defines series of common order codes for the VPX3U-ORIN-CX7-SBC module. The asterisks denote characters of the part number that are defined based on common configuration options. Some common configuration options for this module are:

- Default Power Threshold
- PCIe Configuration Options
- Variant Locked
- Conformal Coatings
- Network Configuration Options
- Display Outputs
- Network Security Options

Ordering Number	Description
3U VPX Single Slot Configurations	
14T033-F**0***VPX3v10	3U VPX, Conduction Cooled, 1”, NVIDIA Orin, ConnectX-7, WOLF FGX, 10/40/100 GBASE-KR4, one 10 GBASE-KR, one 1000 GBASE-T, PCIe x4, SDI video output
14T033-F**1***VPX3v10	3U VPX, Conduction Cooled, 1”, NVIDIA Orin, ConnectX-7, WOLF FGX, two 10 GBASE-KR, one 1000 GBASE-T, PCIe x8, SDI video output

* Contact Sales for the latest Ordering Numbers and available options

MANUFACTURING AND QUALITY ASSURANCE

WOLF designs modules to pass the following environmental standards:

- MIL-STD-810 (United States Military Standard for Environmental Engineering Considerations and Laboratory Tests)
- MIL-HDBK-217 (Reliability Prediction of Electronic Equipment)
- RTCA DO-160 (Environmental Conditions and Test Procedures for Airborne Equipment) on request

WOLF complies with the following management systems:

- AS9100D: Quality Management System - Requirements for Aviation, Space and Defense Organizations (certified)
- ISO 9001:2015: Quality management systems (certified)
- AS5553: Counterfeit Electronic Parts; Avoidance, Detection, Mitigation, and Disposition (compliant)
- NIST SP 800-171: Protecting Controlled Unclassified Information in Nonfederal Systems (compliant)

Boards are manufactured to meet the following standards:

- IPC-A-610 CLASS 3 (Acceptability of Electronic Assemblies)
- IPC 6012 CLASS 3 (Qualification and Performance Specification for Rigid Printed Boards, Class 3 for High Reliability Electronic Products)
- IPC J-STD-001 (Requirements for Soldered Electrical and Electronic Assemblies)

Caveat: integrated third party modules may not meet the same standards as WOLF manufactured modules.

