


# VPX3U-RTM-VIO

RTM for WOLF 3U VPX, includes support for SDI and ARINC 818

## OVERVIEW

The VPX3U-RTM-VIO module is compatible with the 3U VPX WOLF-1570 module, providing multiple inputs and outputs for the module. The design includes four SPF+ cages which can be populated with HD-BNC or optical transceiver modules to support up to 12G-SDI or ARINC 818 up to 10 Gbps.

For other video I/O options contact WOLF.

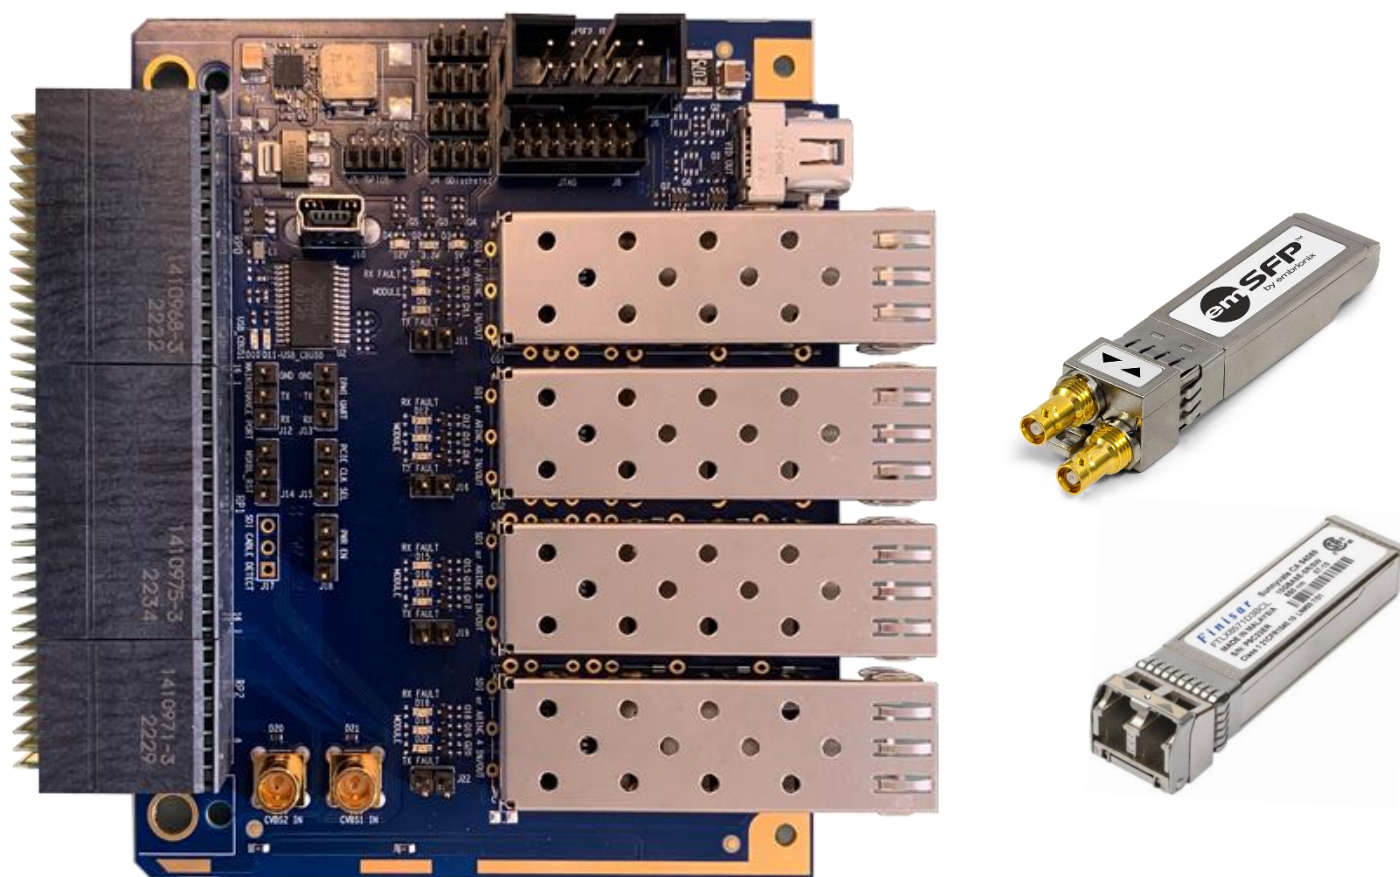

WOLF-1570 RTM with 4 SPF+ cages, representative transceiver modules shown

Four SFP+ Cages that can be populated with transceiver modules, with support for one transmit and one receive simultaneously per module.  
 SDI support: each module supports two HD-BNC connectors, up to 12 Gbps  
 ARINC 818 support: each module supports two optical connectors, up to 10 Gbps

